



Thank you for purchasing this Elite product. You will need the following tools:
Phillips Head Screw Driver • Straight Blade Screw Driver • Rubber Padded Hammer or Mallet

ASSEMBLY INSTRUCTIONS
















TV STAND: Model EL-147, Model EL-147 S


OVERALL DIMENSIONS: 18" H x 47" W x 20" D (Top), 22" D (Bottom)

CABINET PARTS

1. Bottom Panel
2. Top Panel
3. Left and Right Side Panels (Identical)
4. Center Vertical Support
5. Left and Right Vertical Mouldings
6. Two Adjustable Shelves
7. Back Panel (2 identical parts)
8. Two Glass Doors

Hardware for unit assembly

A  5 Casters	B  20 3/8" Wood Screws for Casters	C  16 Connecting Bolts
D  2 Magnetic Touch Latch	E  4 1/2" Wood Screws for Manetic Touch Latch	F  16 Camlocks
G  16 5/8" Screws for Back Panel	H  8 1" Long Shelf Pins	J  16 Plastic Camlock Covers
K  16 Wooden Dowels	N  2 Glass Door Hinges	P  4 Protective Plates
Q  2 Metal Strike Plates	R  2 Foam Protective Pads	S  4 Plastic Bushings

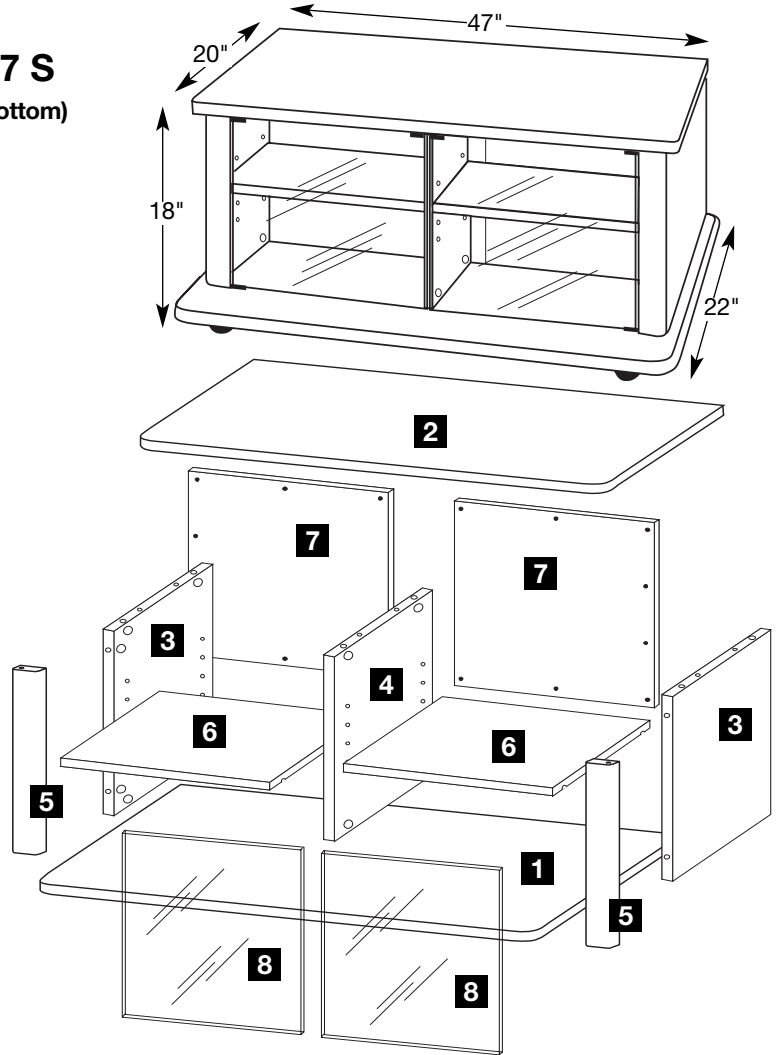

IMPORTANT NOTES & CAUTIONS/WARNINGS

- Carefully read and follow these instructions for assembly.
- Please handle parts carefully, some parts may be heavy and can have sharp edges – we recommend possibly using cloth protective gloves for extra protection.
- To protect the unit and your flooring surface we recommend working on a padded or carpeted area, you may also use the open box the unit came in for this purpose.
- For proper construction & integrity/assembly and for TV weight support and safety, all connections need to be sufficiently tight. However, do not over-tighten connections to the point of stripping screw threadings. Parts are designed to fit together tightly, however, avoid excessive force but rather align & fit panels together methodically and with patience.
- For some heavy or large units, it may be recommended for 2 people to work together on this assembly.
- It is extremely important to attach the **BACK PANEL** as instructed within this manual. Such panels are crucial for the stability and structural support of the unit.
- Please read additional **important safety information** at the end of this instruction manual.
- We urge you to keep this manual with your unit for future reference.


SPECIAL NOTE

In all steps involving camlocks, please note the correct position of the camlock in the illustration at the left. Check all camlocks before aligning and joining pieces together.
IMPORTANT: Throughout assembly of the unit, camlocks must be inserted with the openings facing the nearest unfinished edge and screwdriver slot parallel to unfinished edge.


CAMLOCK/CONNECTING BOLT PROCEDURE



1 BOTTOM PANEL PREPARATION

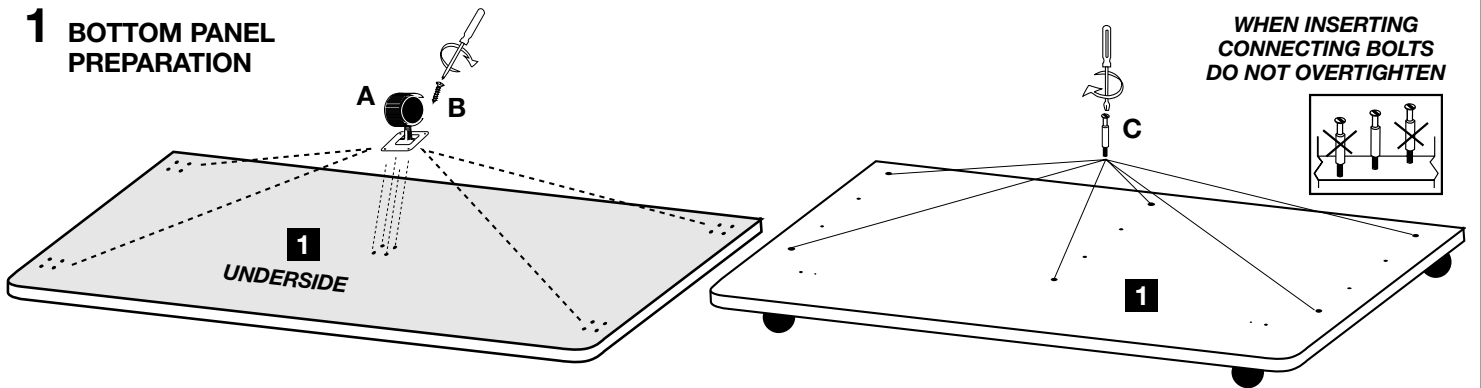

WHEN INSERTING CONNECTING BOLTS DO NOT OVERTIGHTEN



Turn Bottom Panel (1) over to attach 5 Casters (A) to the underside using 3/8" Screws (B).


Turn Bottom Panel (1) over. Attach 6 Connecting Bolts (C) into the pre-installed small plastic threaded holes as indicated. DO NOT OVER TIGHTEN.

2 TOP PANEL PREPARATION


Turn Top Panel (2) over to expose the underside.

Attach 2 Magnetic Touch Latches (D) to the FRONT EDGE using 4 Screws (E). **Magnets must face front.**

Attach 6 Connecting Bolts (C) into the pre-installed small plastic threaded holes as indicated. DO NOT OVER TIGHTEN.

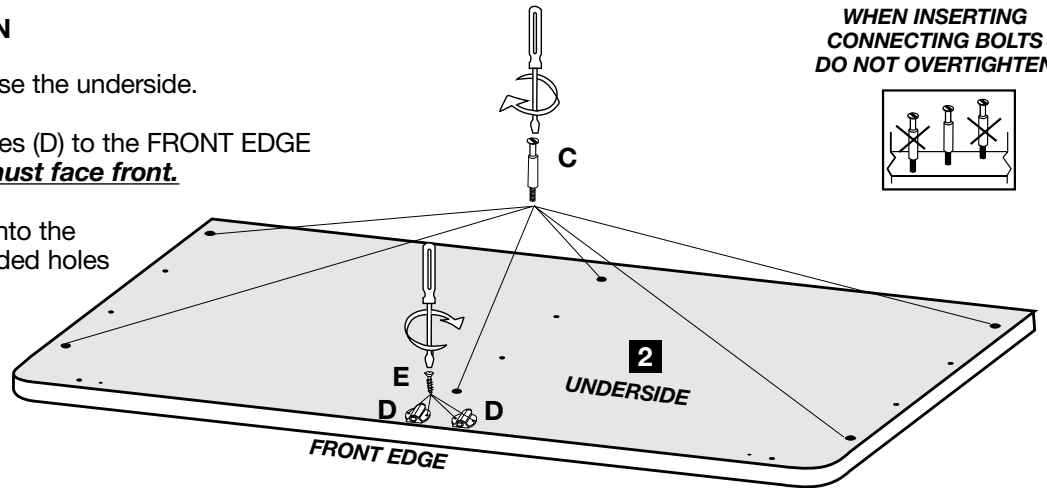

WHEN INSERTING CONNECTING BOLTS DO NOT OVERTIGHTEN




3 SIDE PANELS PREPARATION

Insert 4 Wooden Dowels (K) into top and bottom edges of RIGHT Side Panel (3).

Insert 4 Camlocks (F) into top and bottom edges of RIGHT Side Panel (3) **PLUS 2 Camlocks (F) into Front Edge** as shown.

Insert 4 Wooden Dowels (K) into top and bottom edges of LEFT Side Panel (3).


Insert 4 Camlocks (F) into top and bottom edges of LEFT Side Panel (3) **PLUS 2 Camlocks (F) into Front Edge** as shown.

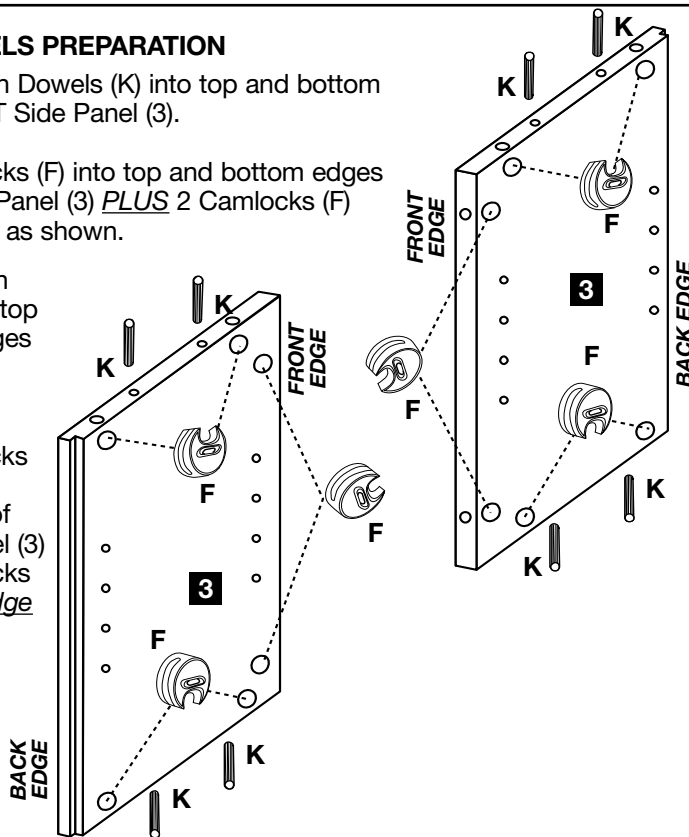

4 CENTER VERTICAL SUPPORT PREPARATION


Insert 4 Wooden Dowels (K) into top and bottom edges of Center Vertical Support Panel (4).

Insert 4 Camlocks (F) into top and bottom edges of Center Vertical Support Panel (4).

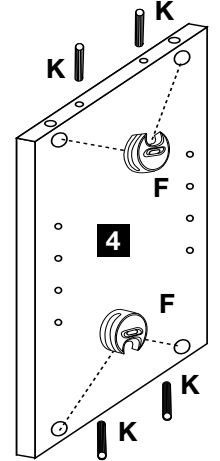

5 VERTICAL MOULDINGS PREPARATION

WHEN INSERTING CONNECTING BOLTS DO NOT OVERTIGHTEN

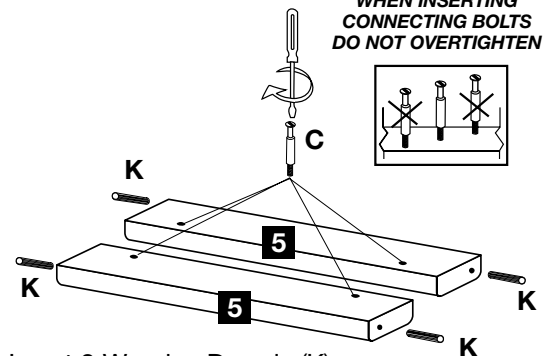

Insert 2 Wooden Dowels (K) into top and bottom edges of each Vertical Moulding (5). Insert 2 Connecting Bolts (C) into each Vertical Moulding as shown.

SPECIAL NOTE


Camlocks must be inserted with the openings facing the nearest unfinished edge and screw-driver slot parallel to unfinished edge.

6 ATTACH MOULDINGS TO SIDE PANELS

Align the Connecting Bolts of Right Vertical Moulding (5) with the corresponding holes of Right Side Panel (3). Join together. Turn 2 corresponding Camlocks (F) 180° to lock.


Align the Connecting Bolts of Left Vertical Moulding (5) with the corresponding holes of Left Side Panel (3). Join together. Turn 2 corresponding Camlocks (F) 180° to lock.

FOLLOW CAMLOCK/CONNECTING BOLT PROCEDURE BELOW.

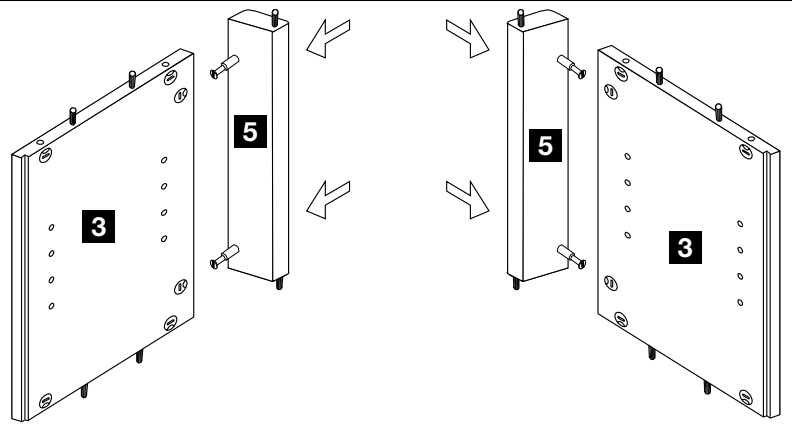


7 ATTACH SIDE PANELS AND CENTER VERTICAL SUPPORT PANEL TO TOP AND BOTTOM PANELS

Align the Connecting Bolts of Bottom Panel (1) to the corresponding holes of Right and Left Side Panels (3) and Center Vertical Support Panel (4). Be sure that the Wooden Dowels of Right and Left Side Panels and Center Vertical Support Panel also align with the corresponding holes of Bottom Panel (1). Join pieces together.

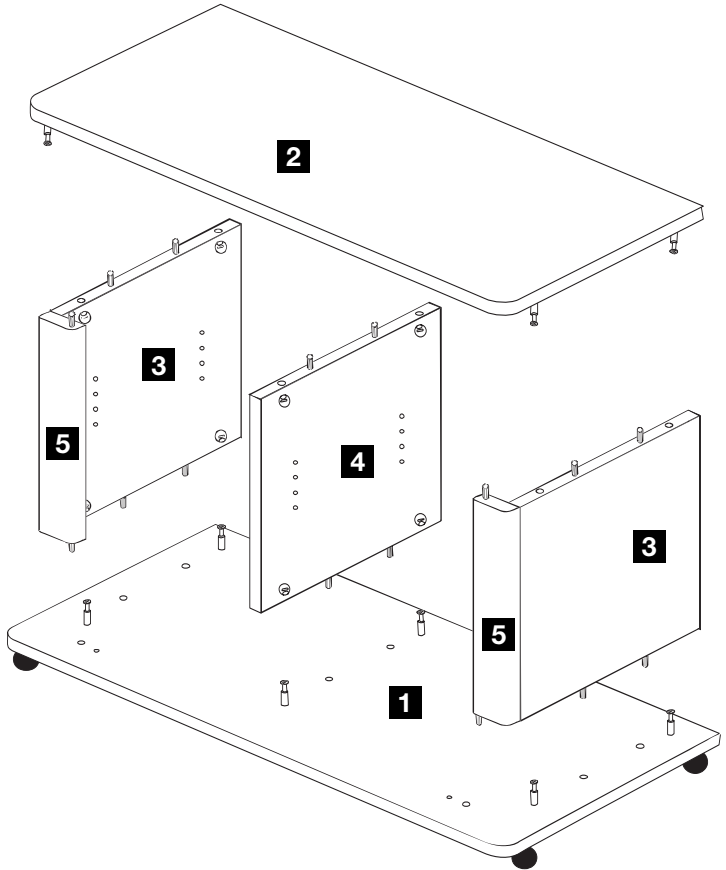

CAMLOCK CONNECTING BOLT PROCEDURE

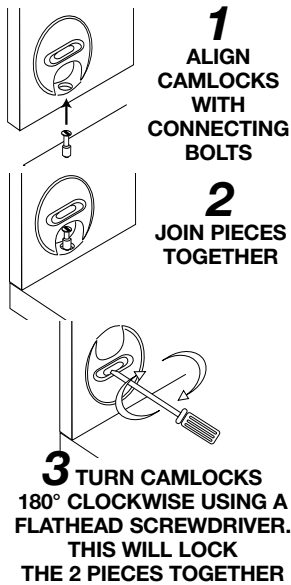


FOLLOW CAMLOCK/CONNECTING BOLT PROCEDURE SHOWN AT THE LEFT.

Align the Connecting Bolts of Top Panel (2) to the corresponding holes of Right and Left Side Panels (3) and Center Vertical Support Panel (4). Be sure that the Wooden Dowels of Right and Left Side Panels and Center Vertical Support Panel also align with the corresponding holes of Top Panel (2). Join pieces together.

TURN CAMLOCKS 180° CLOCKWISE TO LOCK PIECES TOGETHER.



8 ADD CAMLOCK COVERS

ADD CAMLOCK COVERS (J) TO ALL LOCKED VISIBLE CAMLOCKS




9 ADD ADJUSTABLE SHELVES

Insert 4 Shelf Pins (H) in the desired holes for each Shelf (6). Place each Shelf (6) inside unit from the back.

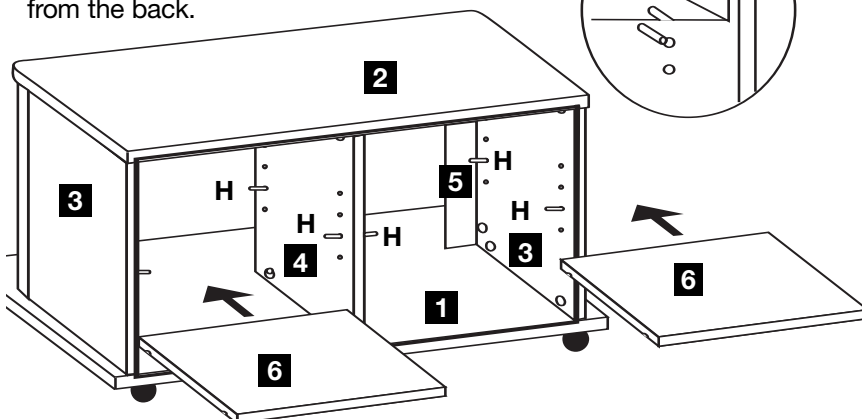


10 ATTACH BACK

Attach Back Panel (7) to unit fitting it inside groove at back of unit and securing it with 5/8" Wood Screws (G).

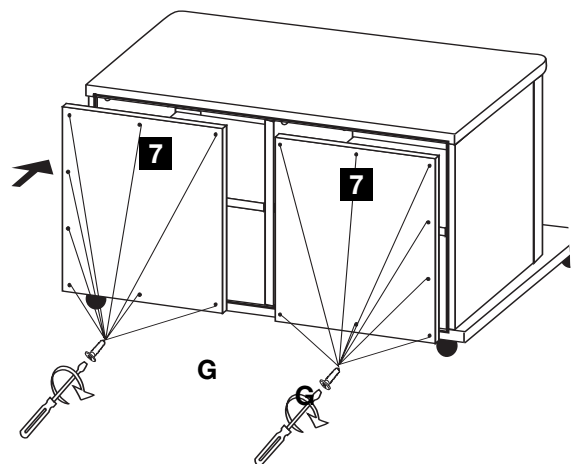


11 ADD GLASS DOORS


Insert 4 Plastic Bushings (S) into holes in Bottom Panel (1) and underside of Top Panel (2).

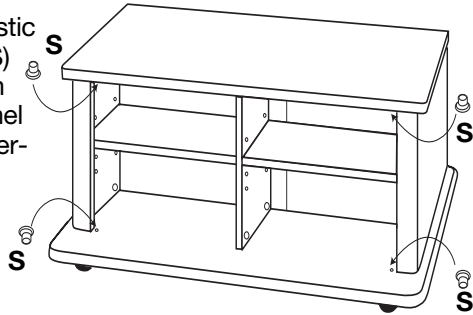

Insert 2 Glass Door Hinges (N) into Bushings (S) of Bottom Panel (1) as indicated.

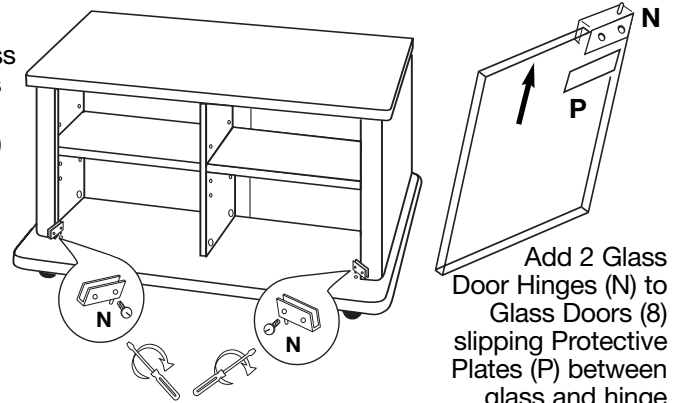


Add 2 Glass Door Hinges (N) to Glass Doors (8) slipping Protective Plates (P) between glass and hinge setting screws.

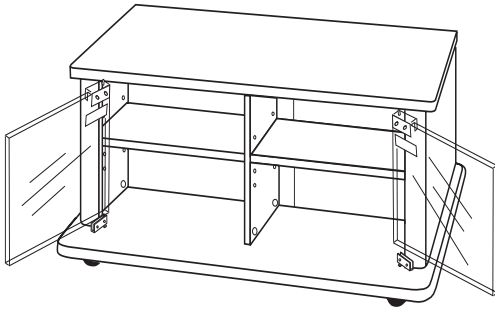

Insert Glass Door into Bushing in Top Panel and slide into hinge at bottom. Tighten set screws at top and bottom.

NOTE: If doors overlap, loosen setting screws and slide door in hinge as needed. Make sure setting screws stay in contact with protective plates when tightened, Remove paper backing from Foam Pad (R) and attach/wrap over top inner corner of door. Slide metal Strike Plate (Q) over pad. Repeat for second door.



IMPORTANT NOTICE

Top Panel, Part #2 is designed to be used with TV's and other A/V equipment **NOT** weighing more than **176 lbs.**

The loading weight needs to be evenly distributed across top panel and for optimum stability, Place TV in a center position on Top Panel, not unbalanced to the side against edge for example.

If the TV's supporting legs on the left & right are naturally situated directly above location of supporting Side Panels (3), **you may then load up to 198 lbs. maximum on Top Panel (2).**

Also: Note dimensions for Top Panel Surface as listed at the beginning of this manual and read the following "Important Safety Precautions".

Bottom Panel, Part #1 is divided into two separate compartments. Each side is designed to be used with A/V components **NOT** weighing more than **55 lbs. per compartment.**

Adjustable Shelves, Part #6, are designed to be used with A/V components **NOT** weighing more than **33 lbs. per shelf.**

HOWEVER, for the total unit loading capacity, **DO NOT** exceed a total of **290 lbs.**

IMPORTANT SAFETY PRECAUTIONS

Please carefully read & follow these **important safety information notes** for proper use of the furniture you have just assembled. They are **designed to avoid unsafe conditions** that can result in property damage, bodily injury or death. We therefore urge strict adherence to the following basic principals:

- Install this unit on a flat & level surface only.
- Avoid placing unit in direct sunlight or near heating source. We recommend not placing unit directly against wall but rather leaving a narrow space between unit and wall for proper ventilation of your A/V equipment.
- Do not exceed the above recommended weight loading limits as this can result in sagging or structural failure of the supporting panel leading to unsafe conditions.
- TV screen sizes are measured diagonally, therefore, base foot-print size for specific TV's can not be determined by screen size as they vary from manufacturer to manufacturer. Rather you will need to measure the TV's base foot print and compare it to the top panel surface size of your furniture as listed in this manual.
- Make sure to place TV **within** the surface area of the top panel, a bit inward from the front edge and centered. **Never** use with a TV that is **too large. The TV base foot print surface must be able to sit completely on the top panel surface.**
- When choosing locations for stacking A/V components on shelves, make sure to place the heaviest A/V equipment on the lowest possible shelves/bottom panels first.
- **Children should *never* be allowed to climb on or play with this furniture or/and the TV.** This can result in an unsafe situation which may lead to the TV and/or the furniture itself to become unsteady, slip, tip or fall over. Avoid using higher shelves or the top surface of the TV for objects that may tempt children to reach and climb. Such items can include toys, food, as well as remote controls, etc. Proper supervision and common sense is always required.
- Glass doors are "Tempered." This is a special process for achieving strength and safety. Although durable & solid we recommend avoiding bumping into glass with force or dropping or chipping edges etc. Special caution should be given to glass corners, both, for protection of glass as well as most importantly to avoid the possibility of injuries resulting from strong impacts against corners especially with children. Doors should be opened & closed gently. (Tempered glass is designed to shatter upon very strong impact and rather than producing sharp knife-like dangerous edges, it turns instead into small pebble-like pieces.)
- **Moving the unit:** The strong caster wheels on this unit are intended for normal short-distance indoor use only, not for rough floor surfaces or outdoor use. Do not drag unit when moving and especially be careful not to move unit on a carpeted surface or on a rug if it may pose resistance for caster mobility. If conditions are such, it is always recommended instead to lift unit from both ends with a friend's help. For the sake of safety and to avoid damages, we recommend you move the TV and all A/V components prior to moving this unit. If this is not possible please use much caution and good judgement and seek help to ensure stability and safety as the unit is being moved. Make sure afterwards to properly re-adjust all equipment, centered and stable as originally instructed above.

Congratulations and enjoy your new ELITE product!

To clean your unit, apply window cleaner with soft tissue. This will also eliminate slight surface abrasions or scratches that may have occurred in shipping or handling.

Distributed by: Elite Industries, 77 Gould Street • Bayonne, NJ 07002, Tel.: 201-436-1120 • Fax: 201-436-6960

Elite Industries ensures complete satisfaction with this product. In the event of missing or damaged parts call toll free,

Customer service hours: 8:45-4:45, Monday-Friday, EST., 1-800-ELITE-48 • VISIT OUR WEBSITE AT: www.elite-inds.com